

## Upgrading your FMB50 into a FMB80

### 1. Before you start


- The CD includes the **update** folder necessary to the upgrade of your unit.
- To be able to update your encoder, it has to be connected to the same network as the PC you will use.
- We recommend you connect to the unit using a COM port to follow the update process with a terminal connection.



**Be careful: this update will delete EVERY FILE on the flash (event files, HTML files ...).**  
**In case you have designed special pages or created event and command files, you should first save them on a PC.**  
**The update will completely reset the encoder (the command INIT.ALL will be sent).**  
**The network and serial port configuration will be kept.**

### 2. Upgrading the encoder

1. Insert the CD in your CD drive.
2. the **update** folder at the root of the CD contains all files necessary for the update.
3. Open the Windows Command Prompt in the Accessories menu.
4. Change the directory to the **update** directory using the command:  
`cd D:\update`  
where D is the CD player of your PC.
5. Launch the update with the command:  
`update 192.168.12.34`  
where 192.168.12.34 is the IP address of the FMB50 you are about to update.

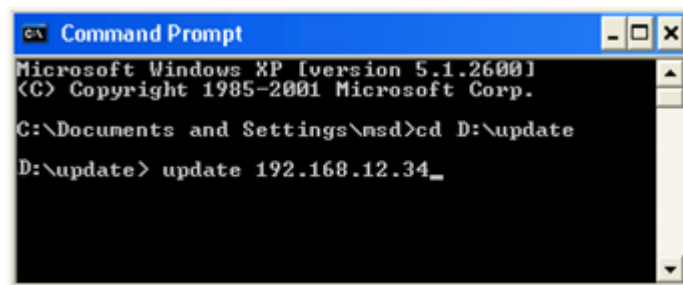

```
Command Prompt
Microsoft Windows XP [version 5.1.2600]
(C) Copyright 1985-2001 Microsoft Corp.

C:\Documents and Settings\msd>cd D:\update
D:\update> update 192.168.12.34_
```


- The update process will take a few minutes. The TX LED on the front panel of the FMB50 will blink rapidly.  
**DO NOT TURN OFF THE ENCODER UNTIL THE PROCESS IS OVER.**
- The encoder will reset twice to enable restoring saved parameters.
- After the second reset, the terminal window will display the following screen:

```

FMB80
AZT24378
*****
* AZT2243 : FMC80 board *
*****
* (c)2000 AZTEC RADIOMEDIA SA *
* 31, rue du Chemin de Fer *
* 67087 STRASBOURG Cedex 2 - FRANCE *
* http://www.aztec-radiomedia.com *
* e-mail : ip2@aztec-radiomedia.com *
* tel : +33 (0)388.30.90.90 *
* fax : +33 (0)388.30.90.90 *
*****
Aztec Radiomedia sa FMB80
FIRMWARE VERSION RDS3780.H (Apr 08 2010,14:43:19) (AZT2918.1)
AZT24378
*****
* AZT2243 : FMC80 board *
*****
* (c)2000 AZTEC RADIOMEDIA SA *
* 31, rue du Chemin de Fer *
* 67087 STRASBOURG Cedex 2 - FRANCE *
* http://www.aztec-radiomedia.com *
* e-mail : ip2@aztec-radiomedia.com *
* tel : +33 (0)388.30.90.90 *
* fax : +33 (0)388.30.90.90 *
*****
Aztec Radiomedia sa FMB80
FIRMWARE VERSION RDS3780.H (Apr 08 2010,14:43:19) (AZT2918.1)
FMB80 by AUDEMAT AZTEC www.audemat-aztec.com

```

- Log on the embedded website and check that your encoder is now an FMB80.

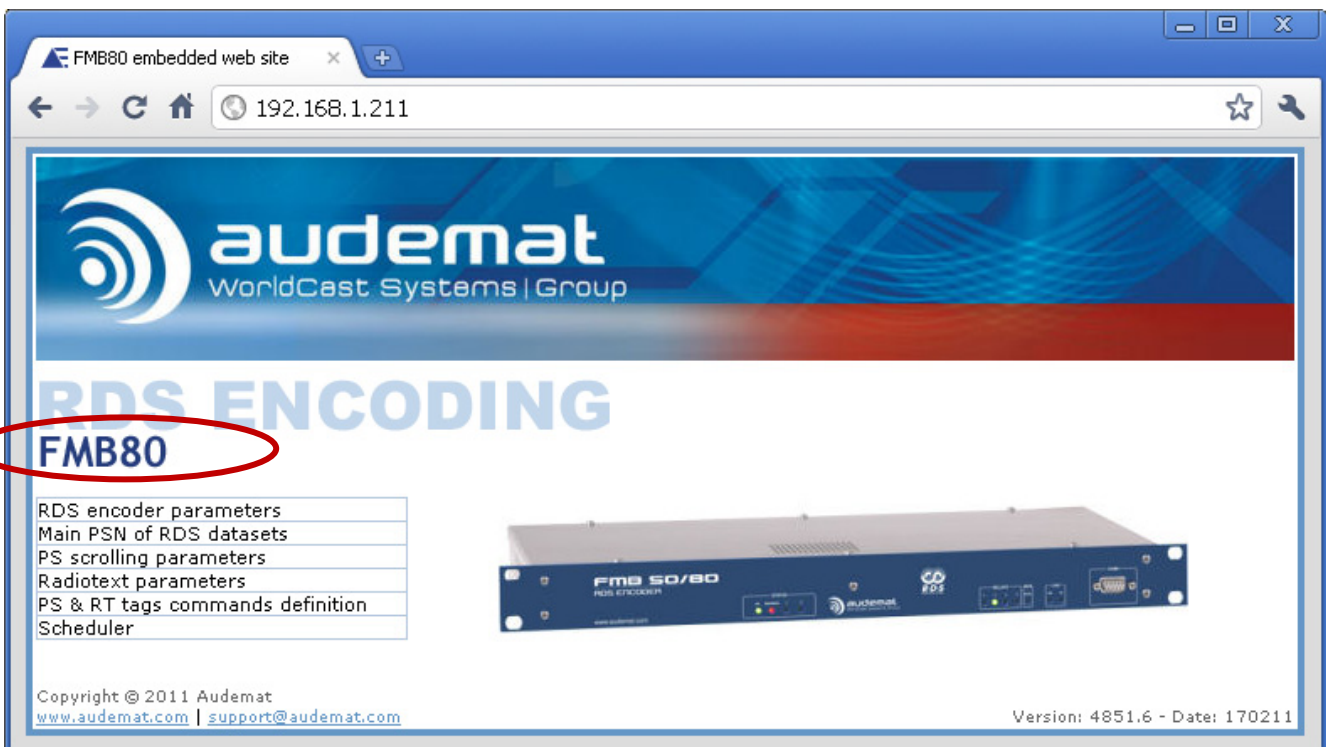

For any question, please contact: [support@audemat.com](mailto:support@audemat.com) or [ussupport@audemat.com](mailto:ussupport@audemat.com)